www.westatlantictech.com
sales@westatlantictech.com
1-902 455 4455

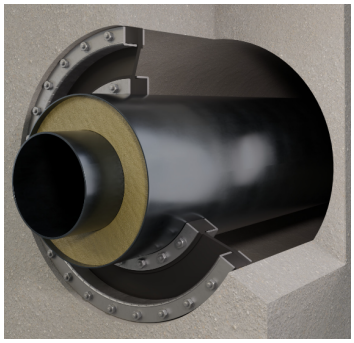

Type 1 mounting inside the opening

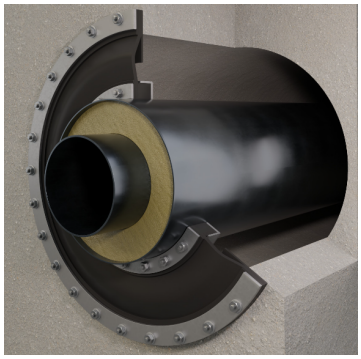

Type 2 mounting outside the opening

WA-GP. AM allows axial or lateral pipe flex and maintains a complete watertight connection to 0.14MPa. (20 psi) Prevents penetration of water, moisture and gases. Ideal for pipes subject to thermal expansion and contraction.

Installation requirements:

For full range expansion and contraction, the wall or sleeve opening should be at least 300 mm (12") larger than the service pipe.

All smooth-walled types of pipes, cables and wires made of any material may be sealed.

If the seal is used underground, protective rings should be used around the seal area so the backfilling does not affect the flexing of the seal.

Diameter range: max OD 500 mm / 20", opening max 1300 mm / 51"

Contact: Westatlantic with your application requirements.

Visit Westatlantic Web page: http://www.westatlantictech.com/pages2/pipe-penetration-sealing-three.php#ax

Thermal, expansion, pipe seals, axial, lateral, through wall sealing, casing, flex, watertight, gas-tight, underground, above ground, USA and Canada, Westatlantic Tech Corp. USA: Texas, TX, Houston, New York, NY, Illinois, IL, North Dakota, ND, Iowa, IA, Ohio, OH, Michigan, New York, NY, Utah, Arkansas, Kentucky, KC, California, CA, Colorado, Denver, Louisiana, LA, Florida, FL., Pennsylvania, PA. Wisconsin, WI. Canada, Ontario, Oakville, Toronto, Mississauga. Alberta, AB; Edmonton, Fort McMurray Calgary, British Colombia, BC, Vancouver, Saskatchewan, SK; Regina, Saskatoon, Prince Albert, Estevan, Swift Current. Manitoba MB; Winnipeg, Thompson. Quebec, QC; Montreal, Quebec City, Saskatchewan, Manitoba, New Brunswick, NS, Newfoundland, NL.